#### INTRODUCTION

Thank you for your purchase of the HA43Pro Reference Headphone Amplifier. The HA43Pro drives up to four pairs of stereo headphones for high qualituy audio monitoring. The unit is intended for sound reinforcement, studio, choir, install, and other applications where a smaller size is desired without sacrificing audio quality.

#### **SPECIFICATIONS**

Input Impedance: 100k Ohms unbalanced

Max Input Level: +14 dBV

Input Connectors: TRS Stereo 1/4" phone, Dual RCA Outputs: 4 TRS Stereo 1/4", 4 TRS Stereo 1/8" (3.5mm)

Output Impedance: 51 Ohms each output

Max Gain: 20 dB/Channel

S/N Ratio: >90 dB THD: < .008%

IMD (SMPTE): <.008%

Power: 12 VDC (Rolls Model PS27)

Weight: 1 lb (.45 kg)

Size: 4.15 x 3.45 x 1.16 (W x H x D)

#### **DESCRIPTION**

INPUTS: 1/4" Stereo TRS jack, and Dual RCA jacks for connectionto the stereo line-level signals to be monitored.

12 VDC PWR: Connects to the Rolls PS27 12 VDC (outside of the barrell positive) adapter.

CHANNEL LEVELS: Sliders 1 - 4 adjusts the level of the indicated


channel.

OUTPUTS 1 - 4: 1/4" and 1/8" (3.5mm) TRS stereo jacks for connection to headphones or earphones.

#### **WARRANTY INFO**

Please visit our website, www.rolls.com, for the Rolls 1 Year Warranty information and registration.

### **SCHEMATIC**

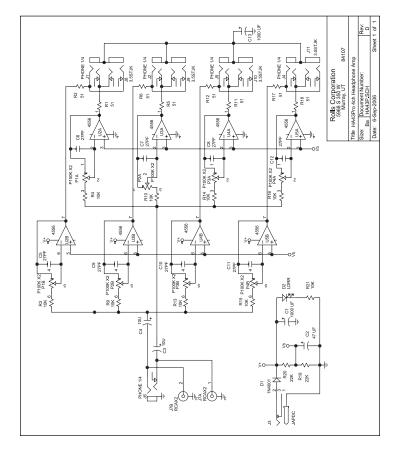

clean, loud headphone amplification. ... anywhere you need four channels of



- Rroadcast

- School

oibuis -

## HA43 Pro 4 Channel Headhone Amp

4-Ch. Studio Headphone Amp



# HA43 Pro 4-Channel Studio Reference **Headphone Amplifier**

The HA43 Pro is a full frequency response four channel headphone monitoring device designed for the recording studio, or other professional applications like listening rooms and monitoring stations. Each output boasts a whopping 20 dB of clean channel gain.

- Stereo 1/4" and Dual RCA Inputs
- Slider Volume controls
- AC adapter included
- Full frequency response
- Lots of output level.... it's loud!





**Rolls Corporation** Salt Lake City, UT 9/06